




## Dimensions

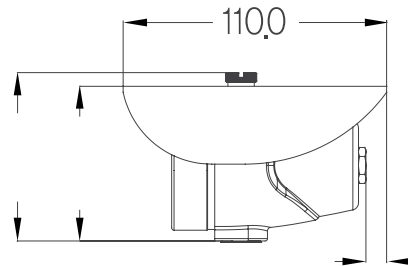

## Summary

High quality and attractive style is what makes the B3252DIR the perfect solution for many cost sensitive applications. Its compact size and unique mounting bracket makes installation as easy as possible. This model offers a 3.6mm fixed lens for general viewing applications, and our 1/3" Samsung CCD chip offers sharp, clear images, which is why it is a great choice for small security applications. Each model includes a power supply and a five year warranty.

## Features

- 1/3" Samsung CCD
- 420 TV Lines
- 3.6mm Fixed Lens
- 35ft Range IR with Intelligent Camera Sync
- AWB (Auto White Balance)
- Clear Image
- Wide Operating Voltage (8VDC-18VDC)
- Low Power Consumption
- Weatherproof Design
- Removable Sunshield
- CE, FCC, RoHS Certified
- Small and Compact Size for Most Applications
- Affordable for Simple Security Applications
- 12VDC Transformer Included
- 5 Year Limited Warranty

## Specifications

| Model                 | DWC-B3252DIR                    |
|-----------------------|---------------------------------|
| Image Sensor          | 1/3" Samsung CCD                |
| Pixels-Total          | 537 (H) x 505 (V)               |
| Pixels-Effective      | 510 (H) x 492 (V)               |
| Scanning System       | 525 Line, 2:1 Interlace         |
| Minimum Illumination  | 0.0 Lux (LED ON)                |
| Horizontal Resolution | 420 TV Lines                    |
| Focal Length          | 3.6mm Fixed                     |
| Power Requirement     | DC 12V                          |
| Power Consumption     | DC12V: 0.9W, 75mA               |
|                       | DC12V: 2.92W, 243mA             |
| Video Output          | VBS 1.0Vp-p (75 Load)           |
| S/N Ratio             | 48dB                            |
| Dimensions            | 110 x 64.7 mm (4.33 x 2.55 in)  |
| Weight                | 0.4 lbs                         |
| Operation Temperature | -29°C ~ +55 °C (-20°F ~ 131 °F) |
| Storage Temperature   | -20°C ~ +70 °C (-4 °F ~ 158 °F) |
| Operation Humidity    | Less than 90%                   |

(\*) Specification is subject to change without prior notice.

