





It's quick. It's easy!

Snapit

Easy Installation 1 2 3



1 Two Screw Installation



2 Adjustment

Completing your installations quickly is a Snap!

Indoor Dome Camera D4363TIR



3 Snap It



STAR-LIGHT™

New ICON Driven OSD Menu

ICON Type Menu will easily guide you through programming options. Simple and fast programming.



HME (Highlight Masking Exposure)

Masks overly exposed light to produce a true video image of any environment.



3D-DNR (Digital Noise Reduction)

Produces less noise and more color at night. An excellent choice.



DRC (Dynamic Range Compressor)

With the advanced light compensation technology DRC, dark spots in images particularly become more visible without overexposing the bright spots to create one perfect image.



DSS (Digital Slow Shutter)

Along with 3D-DNR, Digital Slow Shutter Technology is the primary technology we employ in our Star-Light functioning cameras.




Smart IR - See what is really happening at night.

The breakdown of the video image into five zones allows for an even distribution of the IR, which prevents excessive illumination.





Dimensions

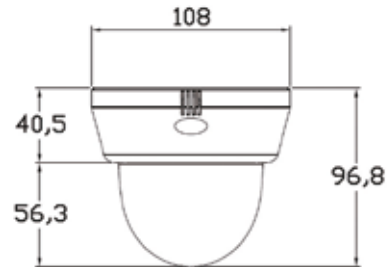

Summary

Our new simple to install housing series combined with our reliable camera technology series gives you a high quality camera in just a few minutes. All Snapit housings include both a built-in UTP and RS-485.

Our Snapit Indoor Dome D4363TIR is powered by our Star-Light technology, which offers super low light imaging for any application. At night, our Smart IR technology illuminates the scene up to 70 feet without added lighting.



Features

- 1/3" Sony Super HAD II CCD
- 560 TV Lines
- 3.3~12mm Varifocal Auto Iris Lens
- 70ft Range IR with Intelligent Camera Sync
- TDN (True Day and Night/TDNS)
- Star-Light (Super Low Light Technology)
- 3D-DNR (3D Digital Noise Reduction)
- DRC (Dynamic Range Compressor)
- HME (Highlight Masking Exposure)
- AGC (Auto Gain Control)
- BLC (Back Light Compensation)
- AWB (Auto White Balance)
- Negative Imaging
- Mirror Image Control
- UTP / RS485 Built-in
- Programmable Privacy Zone (8) & Motion Detection
- Easy Icon Driven OSD Menu with Built-in Joystick
- Auto Sensing 24 VAC / 12 VDC with Line Lock
- Secondary Video-BNC Output
- CE, FCC, RoHS Certified

Specifications

Model	DWC-D4363TIR
Image Sensor	1/3" Super II HAD CCD
Pixels-Total	811 (H) x 508 (V)
Pixels-Effective	768 (H) x 494 (V)
Minimum Illumination	0.14Lux (F1.2, 30IRE-COLOR)
	0.0 Lux (LED ON)
Horizontal Resolution	560 TV Lines (COLOR)
	580 TV Lines (BW)
Power Requirement	DC12V / AC24V
Power Consumption	DC12V: 2.3W, 191.7mA / AC24V: 2.5W, 104mA
	DC12V: 4.8W, 400mA / AC24V: 4.9W, 204mA LED ON
Shutter Speed	1/60s ~ 1/100000s
S/N Ratio	52dB
Gamma	0.45
Sync System	Internal / Line Lock
Operation Temperature	-10°C ~ +55 °C (14 °F ~ 131 °F)
Storage Temperature	-20°C ~ +70 °C (-4 °F ~ 158 °F)
Operation Humidity	Under 90% (Non-Condensing)

(*) Specification is subject to change without prior notice.

