




Dimensions

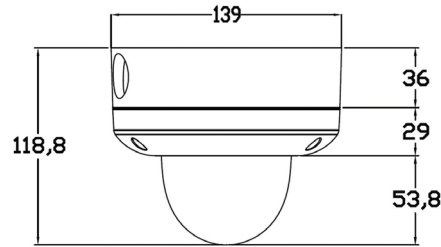

Summary


Our new simple to install housing series combined with our reliable camera technology series gives you a high quality camera in just a few minutes. All Snapit housings include both a built-in UTP and RS-485. Our Snapit vandal dome cameras have a built-in junction box and is IP68 certified. Submerge the camera in water, and it will still work properly!

Our Snapit Vandal Dome V4365T is powered by PIXIM's Seawolf Digital Imaging System. PIXIM's technology allows each pixel to self-adjust in the same scene, giving terrific image quality.

Features

- 1/3" Pixim Seawolf CMOS Sensor
- 690 Horizontal TV Lines
- 3.3~12mm Varifocal Auto Iris Lens
- TDN (True Day and Night/IR Cut Filter)
- Powerful Wide Dynamic Range
- Ultra Low Light Sensitivity
- 3D-DNR (3D Digital Noise Reduction)
- Smear Canceling Circuit
- Low Power Consumption
- UTP / RS485 Built-in
- Junction Box Built-in
- Programmable Privacy Zone (6) & Motion Detection
- Easy Icon Driven OSD Menu with Built-in Joystick
- Auto Sensing 24 VAC/12 VDC with Line Lock
- Secondary Video-BNC Output
- IP68 Certified

3 Axis Gimbal

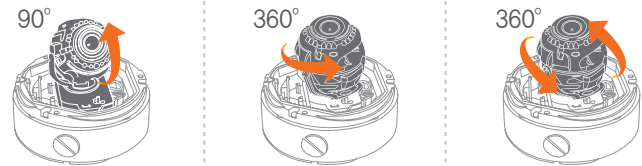

Popular Accessories

- DWC-FMSNAP Flush Mount for Snapit Vandal Dome
- DWC-V1CM Pendant Mount Bracket
- DWC-V1WM Wall Mount Bracket

Specifications

Model	DWC-V4365T
Image Sensor	1/3" Pixim Seawolf CMOS Sensor
Pixels-Total	768 (H) x 548 (V)
Minimum Illumination	0.22Lux (F1.2, 30IRE-COLOR)
	0.0 Lux (LED ON)
Horizontal Resolution	690 TV Lines Effective (COLOR)
Power Requirement	DC12V / AC24V
Power Consumption	DC12V: 3.1W, 258mA / AC24V: 3.2W, 133mA
	DC12V: 4.9W, 408mA / AC24V: 5.0W, 208mA FAN ON
Shutter Speed	1/25s ~ 1/30,720s
S/N Ratio	53dB
Gamma	0.45
Sync System	Internal / Line Lock
Operation Temperature	-29°C ~ +55°C (-20°F ~ 131°F)
Storage Temperature	-20°C ~ +70°C (-4°F ~ 158°F)
Operation Humidity	Under 90% (Non-Condensing)

(*) Specification is subject to change without prior notice.

