


Vandal Dome V3363DH Extreme cold weather camera



Dimensions (Unit : mm)

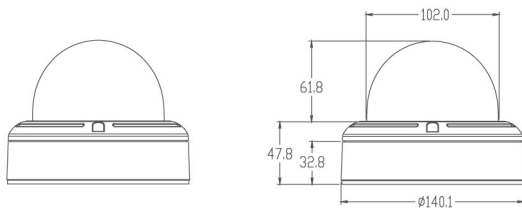

Summary

The V3363DH is an Extreme Weather Vandal Resistant Dome Camera that ensures excellent color sensitivity and High Resolution in both Day and Night applications and incorporates Extreme Weather Design. Part of our Starlight Series of which offers extreme low light capability. Designed for more low light security applications the V3363DH offers a unique Digital Slow Shutter feature, which increases the length of time the shutter remains open to collect additional ambient light thus illuminating typically dark environments. This Extreme Weather model includes a build in heater that allows the camera to withstand temperatures as low as -40F/-40C.

The V3363DH is Day and Night, Extreme Weather, Water Resistant, Dust Proof, Shock Proof and is the right choice for system integration and critical surveillance applications. This product is NEMA rated IP66 and offers a 5 Year Warranty.

Features

- 1/3" Sony super HAD CCD/DNR
- 540 TV Line
- 3.3 ~ 12mm vari-focal auto iris lens
- On-Screen Menu programming with built-in Joystick
- DNR (digital noise reduction)
- DSS (digital slow shutter)
- Secondary Video-BNC Output for easy installation
- Day/Night with Automatic or Manual Control
- Auto sensing 24 VAC/12 VDC with Line Lock
- AWB (auto white balance)
- AGC (auto gain control)
- BLC (back light compensation)
- Mirror Image Control
- Programmable Privacy Zone & Motion Detection
- Sharpness Control
- Operational Temperature -40°C ~ 55°C (-40°F~131°F)
- 5 Year warranty

Mechanical

3D gimbal for easy control (360° Pan, 90° tilt)
 IP 66 certified (Weatherproof)
 Designed to accommodate junction box installation
 Wall & ceiling mount bracket sold separately
 Video test output cable included



Accessories

- DWC-V1WM Wall Mount Bracket for V1,V3 housing
- DWC-V1CM Ceiling Mount Bracket for V1,V3 housing
- DWC-V1CNM Corner Mount Bracket for V1,V3 housing
- DWC-V1JUNC Junction Box for V1,V3 housing



Specifications

		V3363DH
Camera TYPE	Color/B/W	Anti-Vandal Day/Night Digital Dome Camera
	Mount	Surface
Image	Device	1/3" Super HAD CCD
	Pixels-Total	811(H) x 508(V)
	Pixels-Effective	768(H) x 494(V)
Scanning	System	525 line, 2:1Interlace
	Horizontal Frequency Internal Mode	15,734Hz
	Horizontal Frequency Line-Lock Mode	15,750Hz
	Vertical Frequency Internal Mode	59.94Hz
	Vertical Frequency Line-Lock Mode	60Hz
Min. Scene Illumination	Color	0.002 lux@F1.2 50IRE DSS on x128 0.3 lux@F1.2 50IRE
	B/W	0.0002 lux@F1.2 50IRE DSS onx128 0.2 lux@F1.2 50IRE
Functions	Sens-up	AUTO / OFF
	DNR	OFF / LOW / MIDDLE / HIGH
	AWB	ATW / AWC / Manual
	Motion Detection	ON / OFF
	Mirror	ON / OFF
	Privacy Zone	4 Programmable Zone / Size
Lens	Focal Lenght	3.3 ~ 12mm
Resolution	Horizontal	540 TV Lines
Video Output	VBS 1.0Vp-p	VBS 1.0Vp-p(75 Load)
S/N Ratio	S/N Ratio	50dB
OSD	OSD	YES
Environmental Conditions	Operating Temperature	-40°C ~ +55°C(-40°C ~ 131°C)
	Humidity	Less then 90%
Power	Power Requirement	12VDC / 24VAC (60Hz)
	Power Consumption	Normal DC12[V]: 218[mA] / AC24[V]: 102[mA] Wheater DC12[V]: 1.4[A] / AC24[V]: 1.2[A]
Physical Specification	Dimensions(Ø x H)	140.2 x 109.6mm
	Nema Type	IP66
	Weight	2.0 lbs
Certifications	CE, FCC, RoHS	Certified

