


DW-MAX Network Setup (Dynamic IP) Locally

(1) Log in to the Menu and click **ENTER**

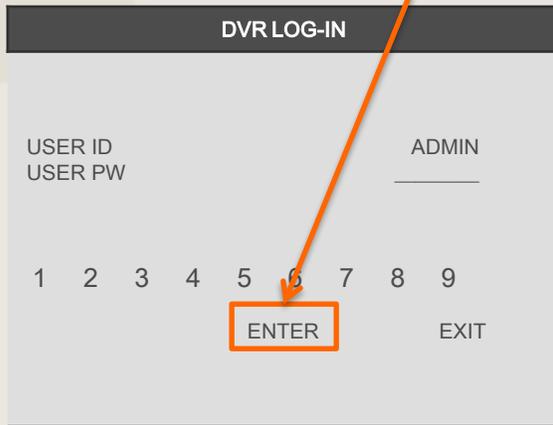


DVR LOG-IN

USER ID ADMIN
USER PW _____

1 2 3 4 5 6 7 8 9
ENTER EXIT

(2) Click on **EXTERNAL DEVICE**

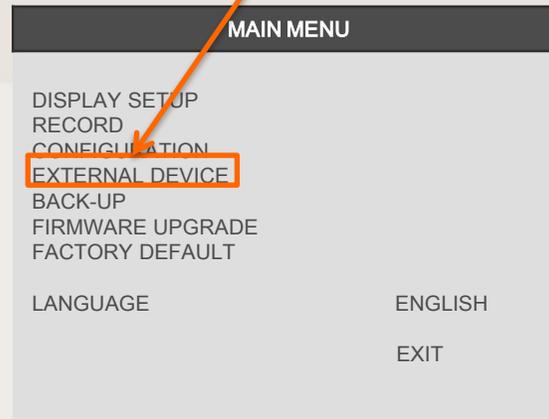

MAIN MENU

DISPLAY SETUP
RECORD CONFIGURATION
EXTERNAL DEVICE
BACK-UP
FIRMWARE UPGRADE
FACTORY DEFAULT

LANGUAGE ENGLISH
EXIT

(3) Click on **TCP/IP SETUP**



EXTERNAL DEVICE

TCP/IP SETUP
PAN/TILT SETUP
MOUSE SETUP
AUDIO SETUP

ESC


(4) Click on **IP SETUP**



TCP/IP SETUP

IP SETUP
DDNS SETUP
BAUD RATE

ESC

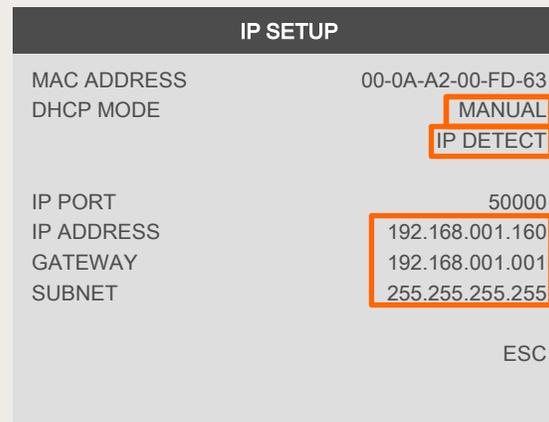

IP SETUP

MAC ADDRESS 00-0A-A2-00-FD-63
DHCP MODE MANUAL
IP DETECT
IP PORT 50000
IP ADDRESS 192.168.001.160
GATEWAY 192.168.001.001
SUBNET 255.255.255.255

ESC


(5) Set **DHCP MODE** to **AUTOMATIC** and click **IP DETECT**

(6) After you see an **IP ADDRESS**, **GATEWAY**, and **SUBNET** change **DHCP MODE** back to **MANUAL**

If you need technical assistant please Call:866-446-3516 option#2

DW-MAX Network Setup (Dynamic IP) Locally


(7) Click **ESC**, then Click on **DDNS SETUP**

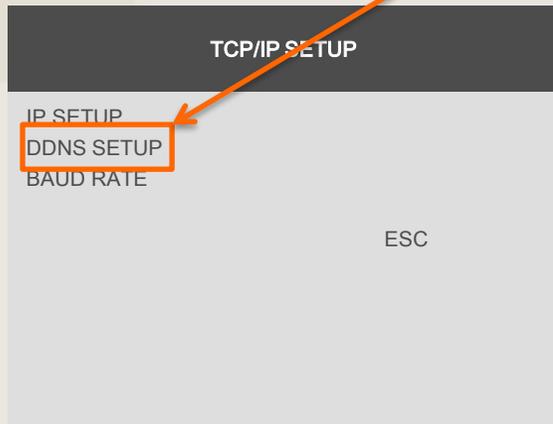

TCP/IP SETUP

IP SETUP
DDNS SETUP
BAUD RATE

ESC

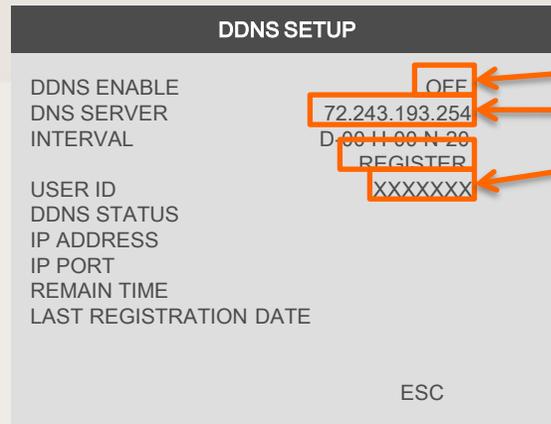

DDNS SETUP

DDNS ENABLE OFF
DNS SERVER 72.243.193.254
INTERVAL D-00 H-00 N-20
REGISTER REGISTER
XXXXXXXX

USER ID
DDNS STATUS
IP ADDRESS
IP PORT
REMAIN TIME
LAST REGISTRATION DATE

ESC

(8) Turn **DDNS ENABLE** to **ON**

(9) Make sure the **DDNS SERVER** is the same

(10) Create a **USER ID**

(11) Click on **REGISTER**

(12) Log in to your router using a computer.

Go to your firewall settings, and forward the **IP PORT** to the **IP ADDRESS** of the DVR on your router.

****All routers function differently. Please refer to your routers manual for instructions about "Port Forwarding", Otherwise consult with your ISP for assistance.**


[If you need technical assistant please Call:866-446-3516 option#2](tel:866-446-3516)

DW-MAX Network IP Setup (Dynamic IP) Remotely


(1) Launch the software and click **NETWORK SETUP**




(2) Select a Site and click **REGISTERING SITE**

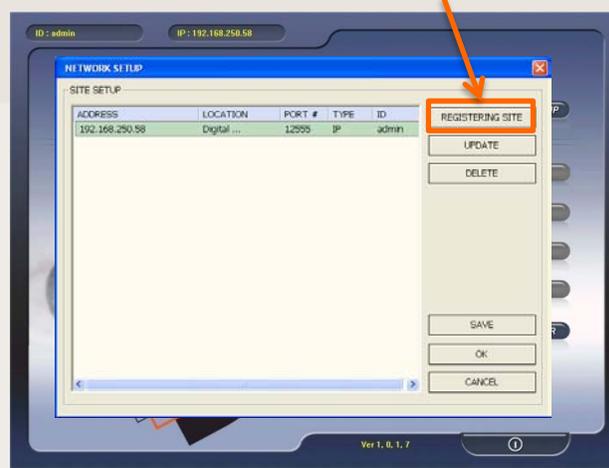


(3) Select **MANUAL**. Enter the IP Address, Port, User ID and Password. Click **OK**

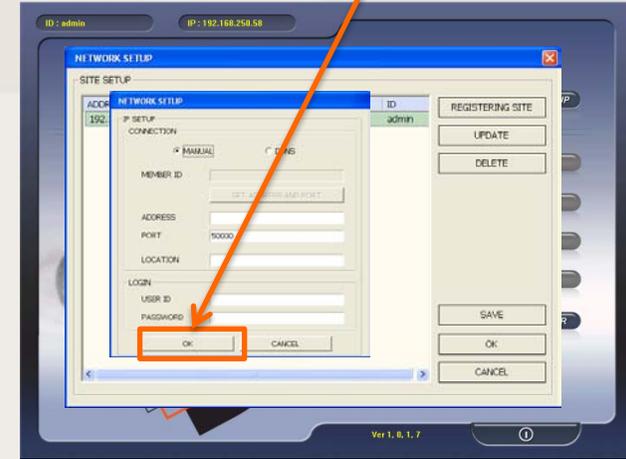

(4) Select a Site and click **OK**

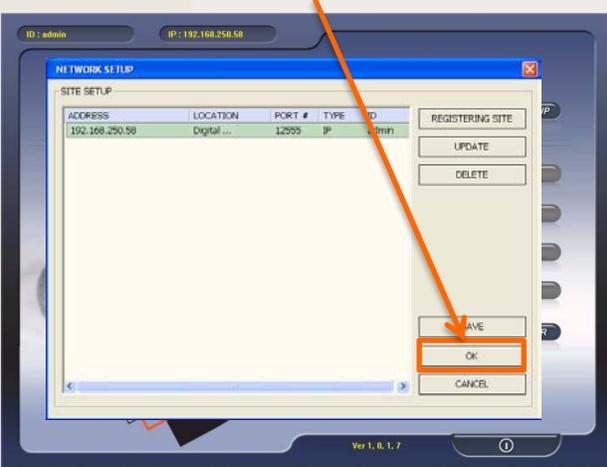

(5) Enter the password and click **LOGIN**

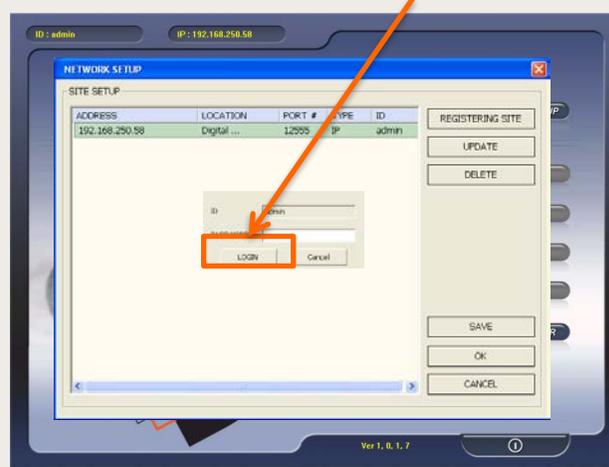


(6) Click on **LIVE**



If you need technical assistant please Call:866-446-3516 option#2

DW-MAX Network IP Setup (Dynamic IP) Remotely

(7) Verify all the information is correct, then click **CONNECT**

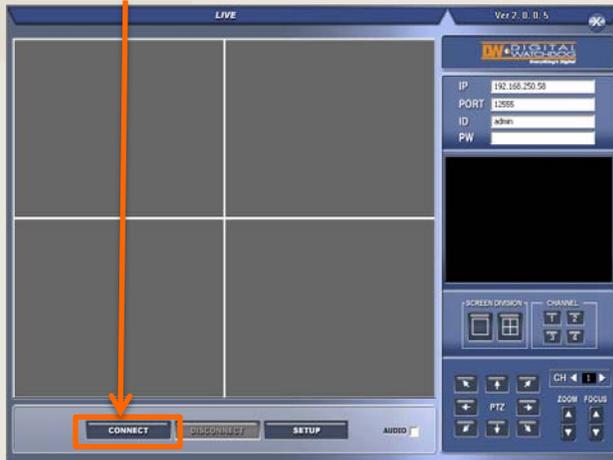


(8) Once you see "CONNECTION ESTABLISHED" the video should load in a few minutes.




[If you need technical assistant please Call:866-446-3516 option#2](tel:866-446-3516)

DW-MAX Network IP Setup (Dynamic IP) Online

(1) Open Internet Explorer and go to <http://za.dwddns.com/xxxxxxx> replacing "xxxxxxx" with the **USER ID** you created, Click on **LIVE**

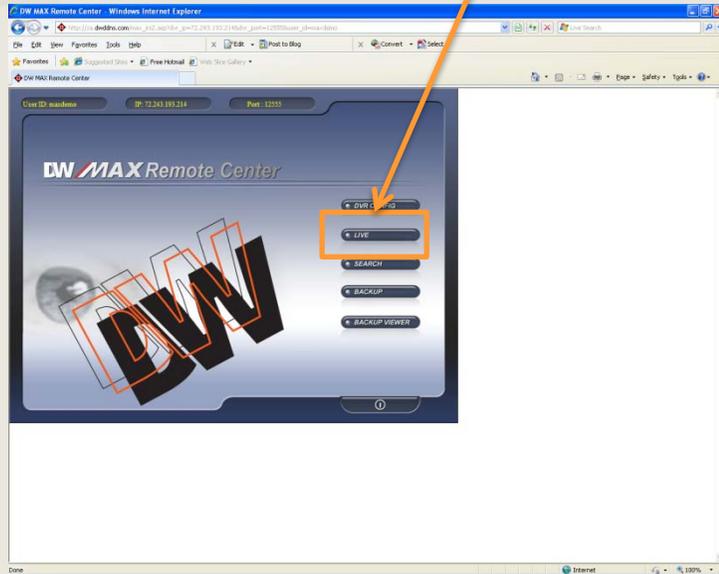

(2) Enter the **PASSWORD** and click **CONNECT**, otherwise click **CONNECT**

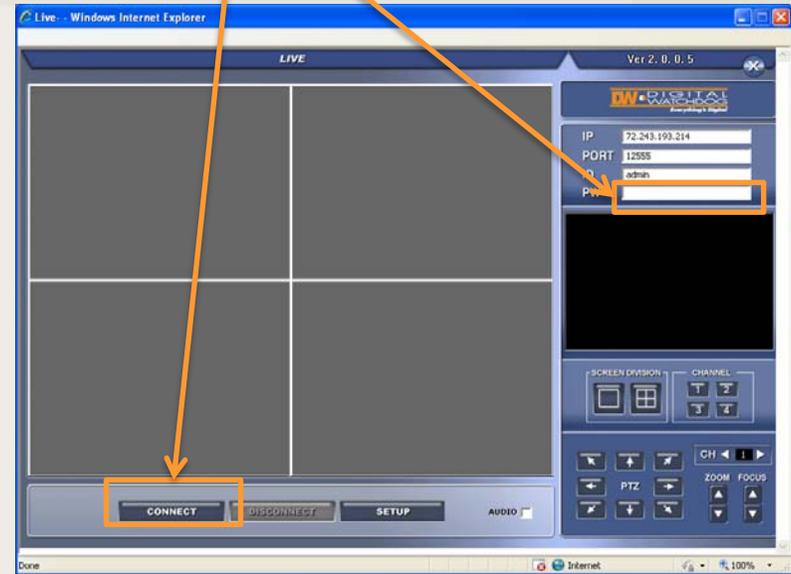

If you need technical assistant please Call:866-446-3516 option#2